


Technical Specification



Model		ISLL-3015(15W)	ISLL-4018(18W)
Solar panel	Monocrystalline	18V 30W	18V 40W
Battery	Lithium battery	12V/10Ah	12V/15Ah
LED source	Max power	12V 15W	12V 18W
	Led chip	110lm per watt from Bridgelux	
	Lumen(LM)	1650lm	1980lm
	Life cycle	50,000 hours	50,000 hours
Housing material	Extruded aluminium alloy with polyester epoxy powder coating		
Charge time	6 hours(full sunlight)		
Discharge time	12-16 hours(full power)		
	30-36 hours (saving model)		
Approval	CE/ROHS/IP65		
Warranty	3 years		
Packing detail	Outline dimension	740*305*140mm	740*305*140mm
	N.W./G.W.	7.8/9.5KG	7.8/9.5KG
	Carton size	810*370*215mm	810*370*215mm

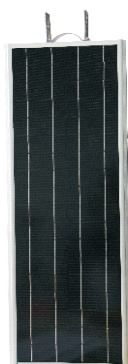

Model		ISLL-4520(20W)	ISLL-5025(25W)
Solar panel	Monocrystalline	18V 45W	18V 50W
Battery	Lithium battery	12V/18Ah	12V/18Ah
LED source	Max power	12V 20W	12V 25W
	Led chip	110lm per watt from Bridgelux	
	Lumen(LM)	2200lm	2750lm
	Life cycle	50,000 hours	50,000 hours
Housing material	Extruded aluminium alloy with polyester epoxy powder coating		
Charge time	6 hours(full sunlight)		
Discharge time	12-16 hours(full power)		
	30-36 hours (saving model)		
Approval	CE/ROHS/IP65		
Warranty	3 years		
Packing detail	Outline dimension	940*305*140mm	940*305*140mm
	N.W./G.W.	1.5/12KG	10.5/12KG
	Carton size	1000*370*215mm	1000*370*215mm

*Note:Lighting pole are available upon request, sold separately.