



# LED Street Lantern

TSL-S80

**Unique structure**

**Excellent heat dissipation**

**High luminous efficiency**

**Topolo**  
enables LED to be brilliant

## Features

**Electrical: AC 220-240Vac 50/60Hz PF >98%**

**LED source: Samsung 3030**

**4 in 1 integrated and come with 224pcs chips**

**Luminous efficiency : 165Lm/W**

**Lifespan:10,000 hours**

**Beam angle: NEMA Type3 or Type 4**

**CRI > 70**

**Compliance Standard**

**IEC/EN60598-1,60598-2-3,LM79**

**IP66 protection rating**

**TUV,CB,CE Approval**



**5 years warranty**




## Technical data sheet

Model	Power	Luminous Flux	CCK	Dimension(mm)
TSL-S80 80	80W	13200Lm	3000/4000/5500K	659X239X86
TSL-S80 100	100W	16500Lm	3000/4000/5500K	659X239X86
TSL-S80 120	120W	19800Lm	3000/4000/5500K	659X239X86
TSL-S80 150	150W	24000Lm	3000/4000/5500K	659X258X86
TSL-S80 185	185W	30525Lm	3000/4000/5500K	659X258X86



## Advantages

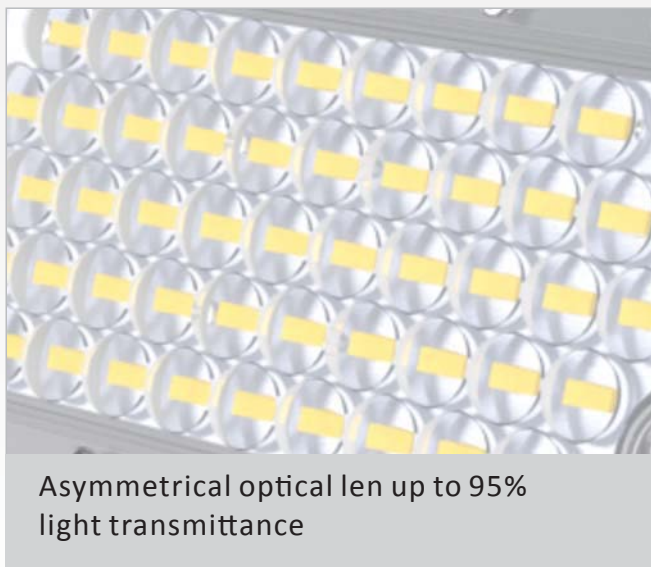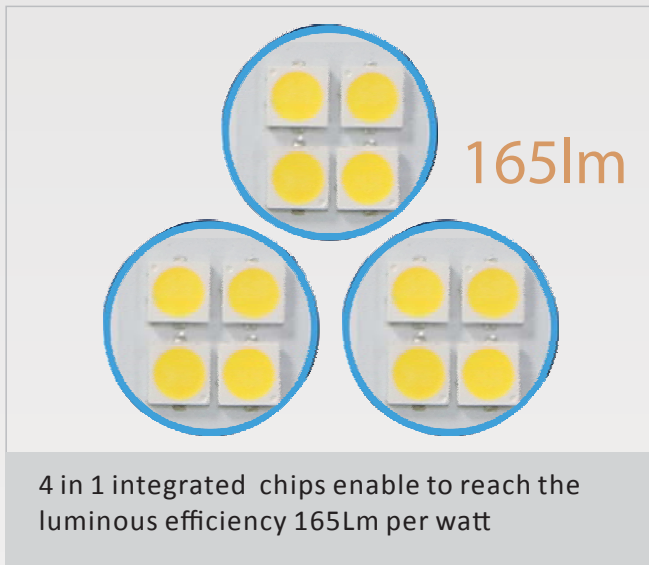

## Outline Dimension

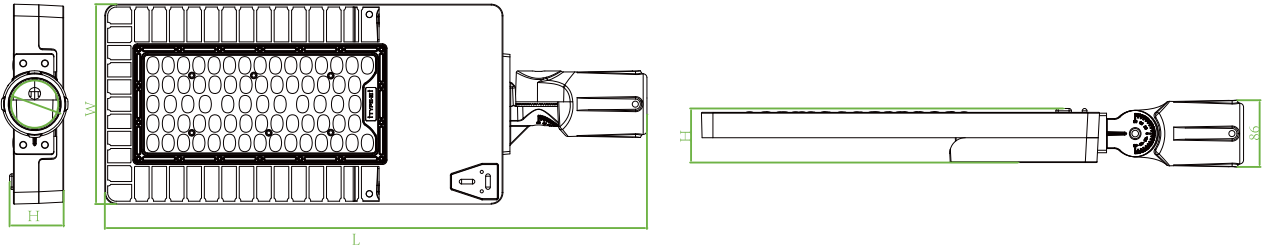

## Photometric Curve

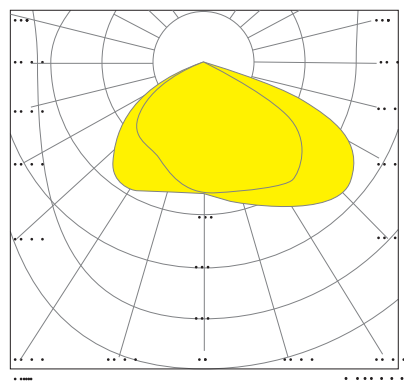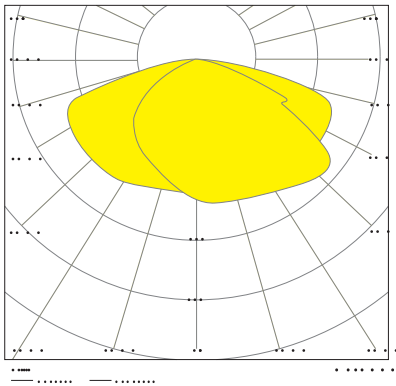

## Application

Designed to meet recommended luminance and illuminance requirements for local to major roadway or street classifications.

