

LED Landscape Light



TSL-GL65

- AC110
277V
- 50Hz/
60Hz
- PF >
0.95
- Ra >
70
- IP65

Features

- Die-cast aluminium housing
- Power :36W & 48W
- Luminous Efficiency: 100lm
- Working Temperature:-35 °C ~+45 °C
- LED Lifespan :50,000 hours
- Mounting Spigot: φ89mm
Light Post: 3.0/4.5 m optional
- Warranty: 2 years




Advantages

- Detachable structure and classic outlook
- A prism optical len with high transmittance rate, anti-glare
- Anti-ageing powder coating, good corrosion resistance
- Reach IP65 IK08 protection grade.

Technical specification

Model	Power	LED Source	Lumen	CRI	CCT	Dimensions(mm)
TSL-GL65036	36W	Lumileds 3030	3600Lm	>70	5000K	Φ780×H667
TSL-GL65048	48W	Lumileds 3030	4800Lm	>70	5000K	Φ780×H667

Outline Dimension

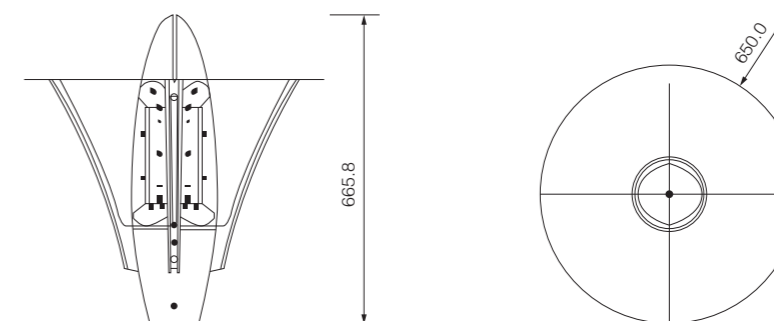

Light distribution curve

