

# Ruarlite LED Lantern



## TSL-SBR

- AC220  
240V
- 50Hz/  
60Hz
- PF  
>0.95
- Ra  
>70
- IP65

### Features

- Compact and scooter design
- Beam angle 70\*140°
- LED lifespan more than 50,000 hours

### Advantages


- Optical len with high transmittance rate up to 90%
- Working temperature:-30℃~+50℃
- IP 65 rating



### Technical specification

Model	Power	LED Source	Lumen	CRI	CCT	Dimensions(mm)
TSL-SBR-30	30W	Bridgelux 3030	3900Lm	>70	4000/5500K	313x121x40
TSL-SBR-50	50W		6500Lm			345x140x50
TSL-SBR-100	100W	Bridgelux 3030	13000Lm	>70	4000/5500K	409x160x52
TSL-SBR-150	150W		19500Lm			500x178x55

### Outline Dimension

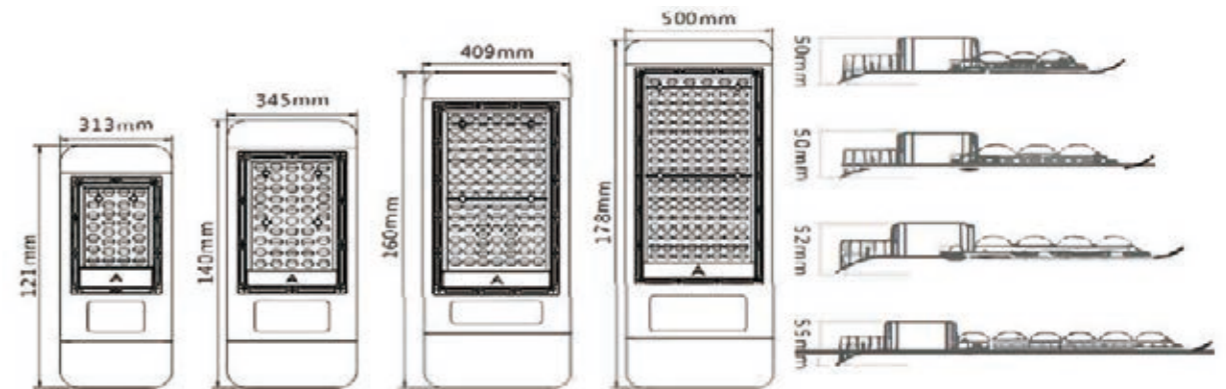

### Application

Pathroad, plant, school, courtyard and outdoor illumination application .

