



LED Modular Tunnel Floodlight

TSL-FL300XT

AC220 240V 50Hz/60Hz PF >0.95 Ra >70 IP65

Features

- Compliance stds: IEC/EN60598-2-1
- Forming process for Aluminum module
- 120 Lumens per watt
- Beam Angle 15°/25°/30°/70°/40°/60°/90°/120°/136°/78°
- LED lifespan up to 50,000 hours
- IP 65 rating

Advantages



- Cooling fin heat sink, multiple direction ventilation for good heat dissipation
- Variant angle optional for PC lens, light transmittance up to 93%
- Adjustabke 15 angle of each module and 270 ° for mounting bracket
- Rust and corrosion resistant, individual power driver come with dustproof shield



Technical specification

Model	Power	LED Source	Lumen	CRI	CCT	Dimensions(mm)
TSL-FL300XT-150	150W	Lumileds 3030	18000Lm	>70	4000/5500K	310.6×343×84
TSL-FL300XT-200	200W		24000Lm			396.6×343×84
TSL-FL300XT-240	240W	Lumileds 3030	28800Lm	>70	4000/5500K	482.6×343×84
TSL-FL300XT-300	300W		36000Lm			568.6×343×84

Outline Dimension

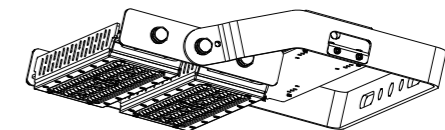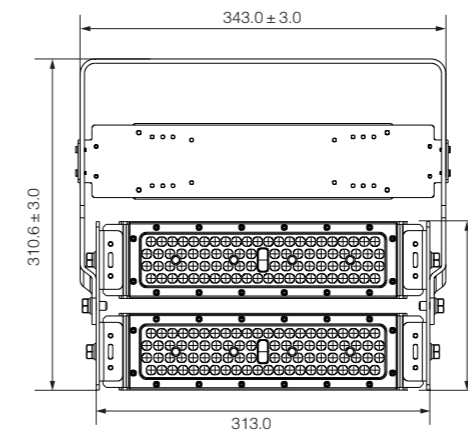

Application

For tunnel, warehouse, other illumination purpose .

